



# RENAISSANCE II distressed




ID-826 ENGLISH TAN

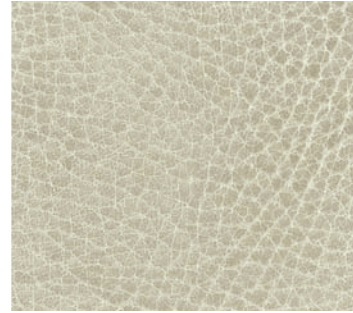


ID-814 VANILLA

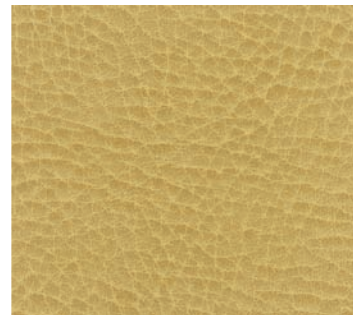


ID-882 MORNING GLORY

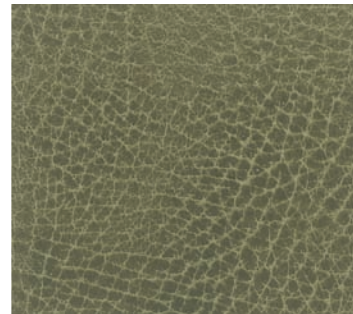


ID-856 VINEYARD

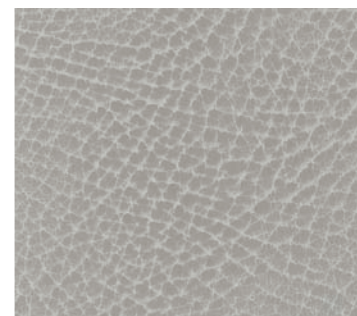

ID-864 SILVER FROST

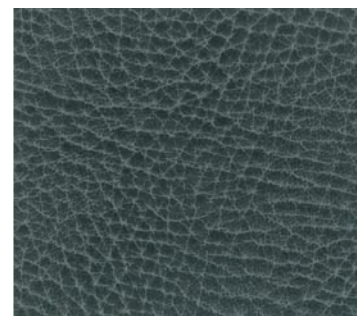


ID-865 FLINT

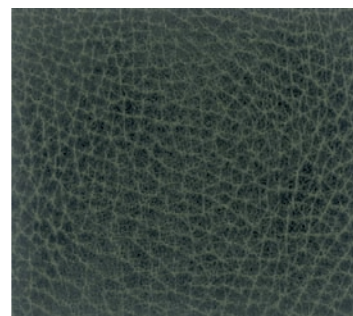


ID-857 LAUREL

# RENAISSANCE II


nature friendly, naturally soft

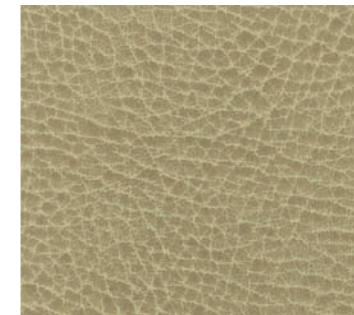


ID-815 RYE

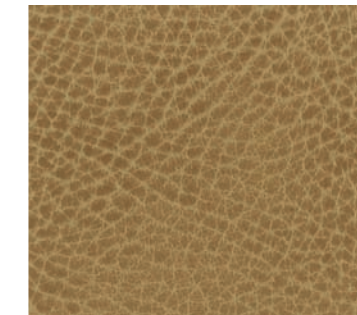


ID-825 CORNHUSK

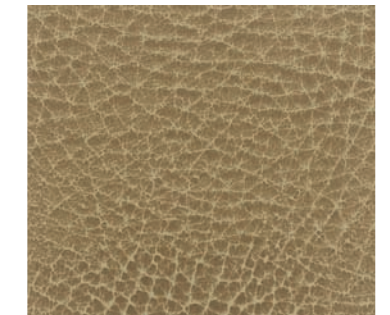

ID-816 SAFARI

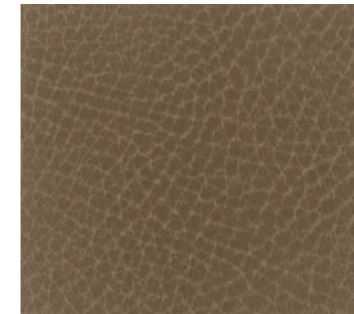


ID-823 TOAST

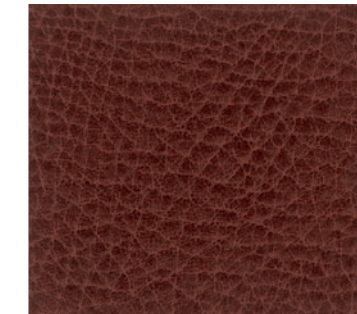


ID-824 RUST




ID-827 CEDAR

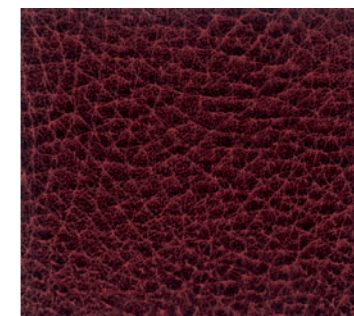

ID-844 NAPA

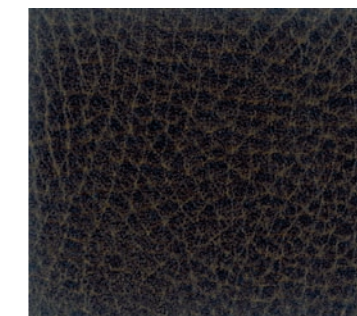

ID-828 SEPIA

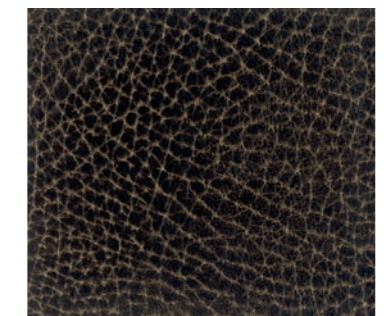

ID-892 FUDGE

Printed colors shown are extremely accurate to the actual colors however please request a memo sample to ensure satisfaction.





*Distressed*

RENAISSANCE II

nature friendly, naturally soft

RENAISSANCE II

nature friendly, naturally soft

*Distressed*

:: SPECIFICATIONS

- . Width: 54"
- . Nominal total thickness: .036 inches
- . Standard weight: 16 oz / linear yard
- . Content: Face: 100% polyurethane  
Back: polyester/rayon blend
- . Roll length: 40 yards

:: FLAMMABILITY REQUIREMENTS\*

- . FMVSS-302
- . CA Bulletin 117 Class-1
- . UFAC-Class 1
- . NFPA 260-Class 1
- . Can be treated to meet FAR Specifications
- \*This term and any other corresponding data refer to typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

:: CARE & CLEANING

- . General Care: While this product is inherently stain resistant, it is important to keep it clean at all times to maintain the original look and the rich feel.
- . Stain Removal: Spot cleaning with soap and water will remove most of the everyday stains without leaving any stain or color behind. Tough, stubborn stains can be removed by a mild cleansing fluid followed by a clean water rinse.

:: NATURE FRIENDLY, NATURALLY SOFT

- . Innovative non-PVC product
- . Contains no volatile compounds which are found in most vinyl-based products.
- . Uses environmentally friendly raw materials during its birth and emits no toxic gas when burned or buried after use.

:: GENERAL CHARACTERISTICS

- . Heavy duty wear resistance
- . Exceeds 36,000 double rubs by wire screen
- \*ASTM D3597 Wyzenbeek
- . Anti-Bacterial/Anti-Microbial treatments (AATCC 147)
- . -20°F cold crack resistant (Fed. Standard 191 A)
- . Oil resistant (AATCC 130-2000)
- . Sulfide stain resistant
- . Ultraviolet resistant
- . Anti-static finish

:: SUITABLE APPLICATIONS

- . Contract interiors
- . Office
- . Restaurant
- . Hospitality
- . Healthcare



FLOCK TEX, Inc.  
200 Founders Dr.  
Woonsocket, RI 02895  
Tel: 401.765.2340  
Fax: 401.765.4915  
Toll Free: 800.556.7286  
[www.flocktex.com](http://www.flocktex.com)