


Utility-Grade Extreme Weather Foil Tape

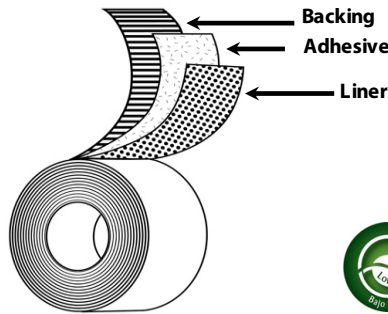

- Backing:** 1.5 mil Aluminum Foil
- Adhesive:** Acrylic
- Liner:** Unbleached Natural Kraft Paper
- Colors:** Aluminum
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 48mm x 46M, 72mm x 46M

Applications

- Taping joints and seams in duct work for A/C, heating, and ventilation systems
- Insulation seaming and patching
- Sealing insulation and repairing in cooler/refrigeration applications
- General purpose industrial and automotive uses.
- Aircraft sealing and masking
- Window mask to protect aircraft canopies, windshields and passenger window surfaces from crazing or hazing during paint stripping

Features

Benefits

- | | |
|---|---|
| <ul style="list-style-type: none"> • 1.5 mil Aluminum Foil Backing • High Performance Acrylic Adhesive • Low VOC Content | <ul style="list-style-type: none"> • Conformable to fit corners and joints • UV, moisture, and mold resistant • Low odor and low VOC content • High tack, aggressive bond to surfaces • Excellent performance in extreme cold or heat • Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED® |
|---|---|

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	3.0 mils	0.076 mm	ASTM D-1000
Foil Thickness	1.5 mils	0.038 mm	ASTM D-1000
Adhesion to Steel	45 oz/in	4.92 N/cm	PSTC-101
Tensile Strength	11 lb/in	19.26 N/cm	ASTM D-1000
Minimum Install Temperature	-5 °F	-20 °C	
Operating Temperature	-35 to 260 °F	-37 to 127 °C	
VOC Content	<30 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.