


# POLYKEN®

# 2730A

## Single-Coated Tape

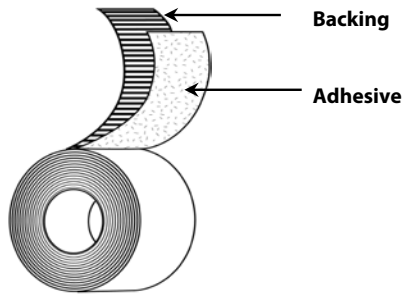

**Backing:** Rubber-Saturated Paper

**Adhesive:** Rubber (1908)

### Applications

- Temporary covering to protect delicate surfaces such as polished metals, aluminum, and composites
- Protection of components while in transport
- Used to protect aircraft carpeting and windows from damage during assembly or transport
- Protects flooring and other work areas during construction, painting, abatement cleanup, etc.

### Features

- Heavy Duty Paper Backing
- Rubber-Based Adhesive

### Benefits

- Resists tearing and scuffing
- Excellent durability
- Withstands UV, moisture and solvents
- Quick adhesion
- Repositionable & clean removal - no residue

### Physical Properties

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness w/liner</b>	16 mils	0.406 mm	PSTC 133
<b>Adhesive Thickness</b>	1.0 mils	0.025 mm	PSTC 133
<b>Carrier Thickness</b>	15.0 mils	0.381 mm	PSTC 133
<b>Adhesion to Steel</b>	40 oz/in	4.38 N/cm	PSTC 101 Mod
<b>Shear Strength</b>	72 hours		PSTC 107
<b>Application Temperature</b>	40 to 125 °F	4 to 52 °C	
<b>Maximum Continuous Use</b>	125 °F	52 °C	
<b>Intermittent Use</b>	160 °F	71 °C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038  
1-800-343-7875 Fax 1-800-328-4822  
www.polyken.com

Nijverheidsstraat 10  
2260 Oevel (Westerlo) Belgium  
32-014-722500 Fax 32-014-722570  
4/27/15