


Double-Coated Polyester Film Tape

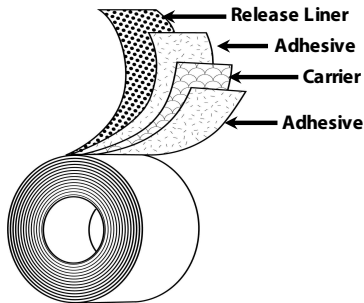

Carrier: Polyester Film
Adhesive: Acrylic
Liner: White Kraft paper
Colors: Red (Adhesive Color)
Specifications: N/A
Standard Sizes: 1" x 60Yd, 2" x 60Yd

Applications

- Corrugate splicing/manufacturing
- Paper converting
- Laminating & frame mounting
- Foil manufacturing
- Printing and plate mounting applications
- High temperature laminating

Features

- Polyester Film Reinforcement
- Acrylic Adhesive
- White Kraft Paper Release Liner

Benefits

- Outstanding conformability for continuous adhesion on irregular surfaces
- Conformable and moisture resistant
- Thin for low-profile splices
- Good tack and adhesion
- Eliminates downtime from adhesive bleeding and splice failure
- Red for visible splices
- Excellent temperature resistance
- Die-cuttable

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	3.8 mils	0.097 mm	ASTM D-1000
Adhesion to Steel	25 oz/in	2.74 N/cm	PSTC-101
Tensile Strength	6 lb/in	10.51 N/cm	ASTM D-1000
Elongation	30%		ASTM D-1000
Operating Temperature	0 to 395 °F	-17 to 201 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.