


Static Port Protection Tape

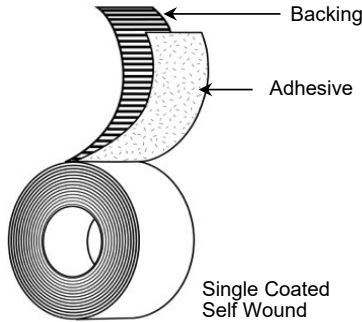

- Backing:** LDPE Film
Adhesive: Acrylic
Liner: N/A
Colors: Gloss Yellow, Orange, Red (Other Colors Available)
Size Options: Incremental widths 1/4" - 54" x 108ft
 Easy-Tear Version & Master Rolls Available

Applications

- High visibility masking of critical static ports
- Color coding and part marking
- Temporary holding and sealing
- Temporary outdoor surface protection
- Temporary attachment and splicing of masking materials

Features

- LDPE Film
- Acrylic Adhesive

Benefits

- Conformable for irregular surfaces
- Withstands temporary outdoor exposure
- Excellent moisture barrier properties
- Resistant to citrus-based cleaners
- holds up to power washing
- UV and solvent resistant
- Firm bond with virtually no edge bleed
- Will not crack or crease
- Excellent high and low temperature performance
- Low in halogens and leachable chlorides

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4.5	mils	0.114	mm	PSTC-133
Adhesion to Steel	50	oz/in	5.47	N/cm	ASTM D-3330
Tensile Strength	11	lb/in	19.26	N/cm	ASTM D-3759
Elongation	400%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.