




110-53

Heavy-Duty Vinyl Tape

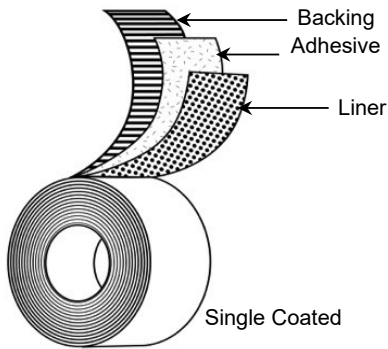

- Backing:** PVC Film
- Adhesive:** Acrylic (A272)
- Liner:** 53# Coated Kraft Paper
- Colors:** Black
- Specifications:** N/A

Size Options: Incremental sizes 1/4" - 54" x 100Ft

Applications

- Provides maximum masking protection during media blast or shot peening applications
- Gasketing material
- Abrasion protection

Features

- PVC Film Backing
- Acrylic Adhesive
- Paper Release Liner

Benefits

- Conformable to irregular surfaces
- Durable and abrasion resistant
- Aggressive long-term bond
- Low residue upon removal
- Excellent low temperature performance
- Die-cuttable
- Easy to apply

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	9.5	mils	0.241	mm	PSTC-133
Substrate Thickness	8.5	mils	0.216	mm	PSTC-133
Adhesion to Steel	50	oz/in	5.47	N/cm	ASTM D-3330
Tensile Strength	25	lb/in	43.78	N/cm	ASTM D-3759
Elongation	160%				
Abrasion Index	34				ASTM D-4060
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 200 °F		-40 to 93 °C		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL GLOBAL assumes any legal responsibility.

