


Polyethylene Screenblock Tape

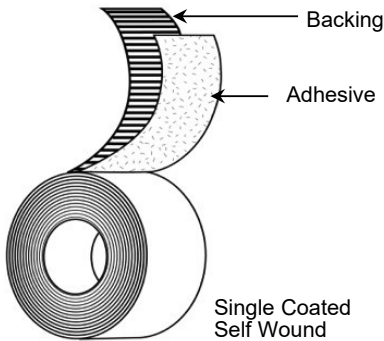

- Backing:** LDPE Film
- Adhesive:** Acrylic (A105)
- Liner:** N/A
- Colors:** Clear, Transparent Orange, White, Blue
- Specifications:** N/A
- Size Options:** Incremental widths 1/4" - 54" x 108ft

Applications

- Border & blockout tape for screenprinting - prevents ink from penetrating beyond the image area
- Bond directly to mesh for multi-color printing and pinhole covering

Features

- LDPE Film
- Acrylic Adhesive

Benefits

- Superior conformability
- High stretch to maintain adhesion during frame re-tension
- Moisture and solvent resistant
- Good tack and moderate adhesion
- Clean removal from most surfaces
- Easy to apply

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4.5	mils	0.114	mm	PSTC-133
Adhesion to Steel	25	oz/in	2.74	N/cm	ASTM D-3330
Tensile Strength	11	lb/in	19.26	N/cm	ASTM D-3759
Elongation	550%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.