


## High Temp PVC Fineline Masking Tape

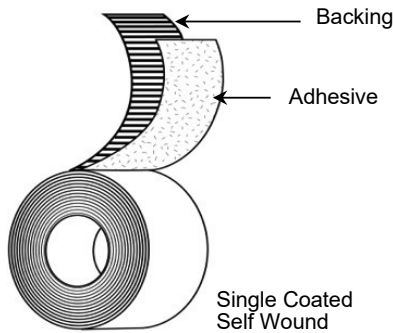

<b>Backing:</b>	PVC Film
<b>Adhesive:</b>	Rubber (R405)
<b>Liner:</b>	N/A
<b>Colors:</b>	Dark Blue Gloss
<b>Specifications:</b>	N/A
<b>Size Options:</b>	Incremental sizes 0.118" - 47.5" x 108Ft

### Applications

- Automotive OEM fineline and bulk masking (RIM and TPO plastics)
- High temperature bake cycles (280 °F up to 45m)\*
- Clean room paint masking
- OEM paintline and powerwash operations
- Short-term outdoor masking
- Autobody aftermarket fineline color separations

### Features

- PVC Film Backing
- Rubber Based Adhesive
- Clean-cut Plastic Core

### Benefits

- Solvent and moisture resistant
- Handles compound and tight radius curves
- Crisp, fineline edge
- Printable backing
- Good high temperature performance
- Clean removability after bake cycle
- Recyclable and clean - no dust or contaminants

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	7.0	mils	0.178	mm	PSTC-133
<b>Substrate Thickness</b>	5	mils	0.127	mm	PSTC-133
<b>Adhesion to Steel</b>	20	oz/in	2.19	N/cm	ASTM D-3330
<b>Tensile Strength</b>	17	lb/in	29.77	N/cm	ASTM D-3759
<b>Elongation</b>	140%				
<b>Application Temperature</b>	60 to 120 °F		16 to 49 °C		
<b>Operating Temperature</b>	40 to 280 °F		4.4 to 138 °C		

\*Room temperature demask recommended

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F

Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.