


Acid-Free PE Overlaminating & Labeling Tape

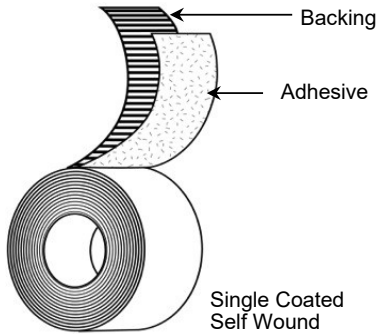

- Backing:** LDPE Film
- Adhesive:** Acid-Free Acrylic (A115)
- Liner:** N/A
- Colors:** Clear or White
- Specifications:** N/A
- Size Options:** Incremental widths 1/4" - 54" x 60ft

Applications

- Overlamine for graphics, signs, and placards
- Replacement for PVC films in medical label and identification applications
- Surface protection against moisture, UV, solvents, and abrasion

Features

- LDPE Film
- Acid-Free Acrylic Adhesive

Benefits

- Tough and abrasion resistant
- UV stable for outdoor applications
- Stands up to harsh environments
- Adheres aggressively to surfaces
- Non-yellowing
- No edge bleed
- Excellent long-term stability
- Latex and phthalates-free

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4.5	mils	0.114	mm	PSTC-133
Adhesion to Steel	70	oz/in	7.66	N/cm	ASTM D-3330
Tensile Strength	12	lb/in	21.02	N/cm	ASTM D-3759
Elongation	450%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 200 °F		-40 to 93 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.