


Acrylic Transfer Tape

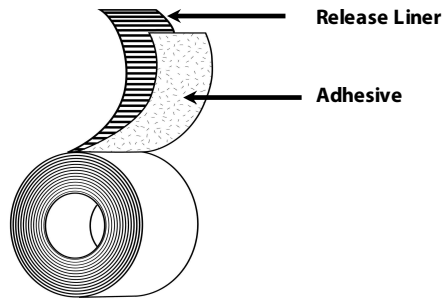

Carrier:	N/A
Adhesive:	Fiber-Filled Acrylic
Liner:	Kraft Paper
Colors:	Red
Specifications:	N/A
Standard Sizes:	1.5" x 60yd, 2" x 60yd

Applications

- Corrugate splicing/manufacturing
- Paper converting
- Laminating and frame mounting
- Foil manufacturing
- Printing and plate mounting applications
- High temperature laminating

Features

- Fiber-Filled Acrylic Adhesive
- Kraft Paper Release Liner

Benefits

- Thin for low-profile splices and good conformability
- Fast tack for reliable, consistent automatic splices at full line speed
- Secure bond won't flag
- Red for visible splices
- Easy to remove
- Die-cuttable

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	2.1 mils	0.053 mm	ASTM D-1000
Adhesion to Steel	24 oz/in	2.63 N/cm	PSTC-101
Tack	2.6"		Rolling Ball Method
Operating Temperature	0 to 395 °F	-17 to 201 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.