


VISQUEEN POLYCROP PRO

Technical Specifications

Width (mm)	Thickness (µm)	Length (m)	Reels/Pallet
750	20	2000	40

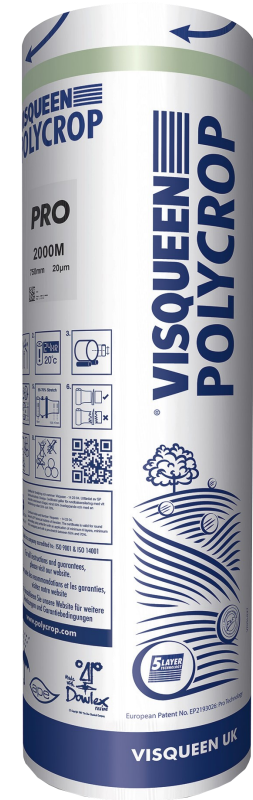

VISQUEEN PolycropPro is available in GREEN

VISQUEEN PolycropPro is UV-stabilised for 12 months: LUV = for Low UV countries with a maximum of 90 kLy MUV = for Medium UV countries (Continental Europe) with a maximum of 140 kLy. HUV = for High UV countries with a maximum of 180 kLy.

VISQUEEN PolycropPro reels are supplied on cardboard cores with an internal diameter of +/- 7,5 cm.

VISQUEEN PolycropPro reels are provided with a core label that mentions width, thickness, reel length and identification reel number.

VISQUEEN PolycropPro reels are individually packed in cardboard boxes or a protective plastic sleeve and stacked on wooden pallets.

VISQUEEN PolycropPro pallets are provided with a pallet label that mentions production- and pallet number, width, thickness, reel length, colour, reels/pallet and production year.