


M-Tak[®] OS 7434B Polyester Double-Coated Tape

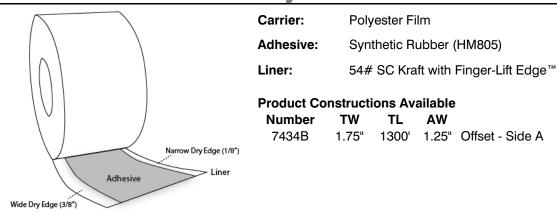

Applications

• Medium to heavy corrugated mailer sealing for high stress shipping applications

Features	Benefits		
Synthetic Rubber Adhesive	 High adhesion for a secure permanent bond to plastics, papers and mailers Strong initial tack 		
PET Film Carrier	Provides support and structure for added stabilityConformable		
Finger-lift Edge Liner	Easy to start, easy to useExtra-wide offset edge for easy removal		

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Tape Thickness (w/o liner)	9.7 mils	0.246 mm	PSTC 133
Liner Thickness	3.2 mils	0.081 mm	PSTC 133
Overall Thickness	12.9 mils	0.328 mm	PSTC 133
Adhesion to Steel (Air Side)	160 oz/in	17.50 N/cm	PSTC 101Mod
Adhesion to Steel (Liner Side)	165 oz/in	18.05 N/cm	PSTC 101 Mod
Application Temperature Range	45 to 120 °F	7 to 49 °C	
Operating Temperature Range	-20 to 170 °F	-29 to 77 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.

