


# POLYKEN® 626-20

## Foilastic® Window & Door Flashing Tape

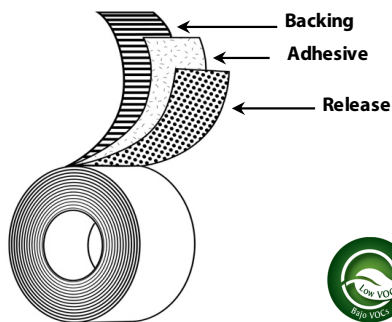

**Backing:** 2 mil Aluminum Foil - Printed  
**Adhesive:** Butyl Rubber  
**Liner:** White Kraft Paper  
**Colors:** Aluminum  
**Specifications:** ASTM E2112  
 15 Year Limited Warranty  
**Standard Sizes:** 4" x 100Ft, 6" x 100Ft

### Applications

- Window and door installations
- Corner board abutments
- Sidewall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

### Features

- 2 mil Aluminum Foil Backing
- Premium Butyl Rubber Adhesive
- Kraft Paper Release Liner

### Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for indefinite outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent all-temperature performance
- Compatible with sealants and caulking
- Self-healing after puncture
- Easy to remove

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	20.0 mils	0.508 mm	ASTM D-1000
<b>Adhesion to Steel</b>	279 oz/in	30.52 N/cm	ASTM D903-93
<b>Adhesion to Plywood</b>	96 oz/in	10.50 N/cm	ASTM D903-93
<b>Adhesion to OSB</b>	76 oz/in	8.31 N/cm	ASTM D903-93
<b>Adhesion to PVC</b>	200 oz/in	21.88 N/cm	ASTM D903-93
<b>Adhesion to Housewrap</b>	232 oz/in	25.38 N/cm	ASTM D903-93
<b>Tensile Strength</b>	18 lb/in	31.52 N/cm	ASTM D-1000
<b>Installation Temperature</b>	30 to 180 °F	-1 to 82 °C	
<b>Operating Temperature</b>	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.