


Fineline Masking Tape

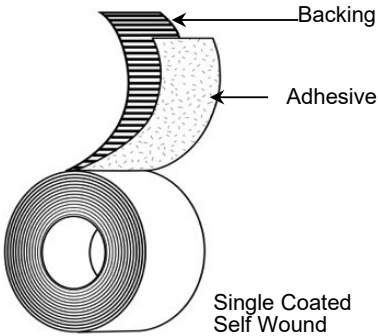

- Backing:** Embossed Polypropylene
- Adhesive:** Pigmented Polyurethane (U515)
- Liner:** N/A
- Colors:** Green
- Specifications:** N/A
- Size Options:** Incremental sizes 1/8" - 48" x 180Ft

Applications

- Automotive OEM and aftermarket fineline masking
- Masking color separations on plastic, aluminum, steel, and fiberglass

Features

- Embossed Polypropylene Backing
- Polyurethane Adhesive
- Clean-cut Plastic Core

Benefits

- Conformable
- Solvent resistant
- Transparent for easy application
- Good all temperature performance
- Holds up to many paint systems
- Excellent surface wettability
- Splinter & fiber free for less surface contamination

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.0	mils	0.127	mm	PSTC-133
Substrate Thickness	3.5	mils	0.089	mm	PSTC-133
Adhesion to Steel	30	oz/in	3.28	N/cm	ASTM D-3330
Tensile Strength	13	lb/in	22.77	N/cm	ASTM D-3759
Elongation	700%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 250 °F		-40 to 121 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.