


Polyethylene Auto Glass Retention Tape

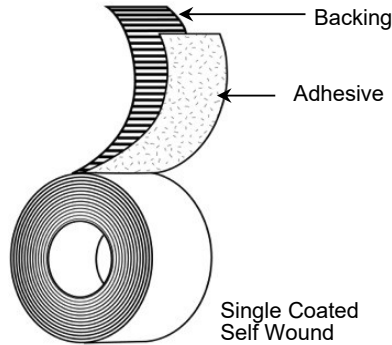

- Backing:** LDPE Film
- Adhesive:** Acrylic (A200)
- Liner:** N/A
- Colors:** Clear, Transparent Orange
- Specifications:** N/A
- Size Options:** Incremental widths 1/4" - 54" x 108ft
Easy tear version also available

Applications

- Auto glass molding retention tape for use in windshield and auto glass replacement or installation
- Tip tape for corner protection on automotive glass during transport and storage

Features

- LDPE Film
- Acrylic Adhesive

Benefits

- Thick and highly conformable
- Abrasion and moisture resistant
- Perforated spacing available
- Solvent resistant
- Excellent high and low temperature performance
- Removes cleanly - will not leave residue
- Easy to apply

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4.5	mils	0.114	mm	PSTC-133
Adhesion to Steel	12	oz/in	1.31	N/cm	ASTM D-3330
Tensile Strength	12	lb/in	21.02	N/cm	ASTM D-3759
Elongation	500%				
Application Temperature	32 to 120 °F		0 to 49 °C		
Operating Temperature	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.