


## Acrylic Transfer Tape

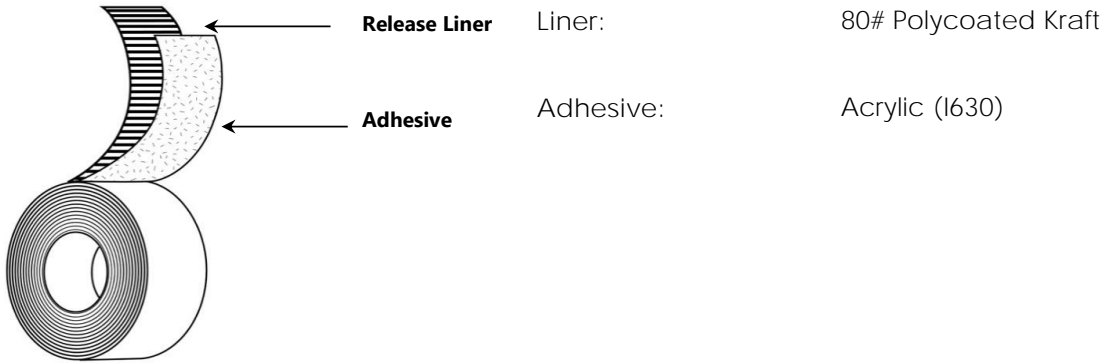

### Applications

- Permanent bonding to a variety of foam materials
- Screen print and nameplate applications
- Mounting sound damping materials

### Features

- Acrylic Adhesive
- 80# Kraft Liner

### Benefits

- High tack adhesive
- Superior bond to a variety of foam substrates
- Excellent peel and shear properties
- Conformable and good dimensional stability

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
Adhesive Thickness	3.0 mils	0.076 mm	PSTC 133
Liner Thickness	4.0 mils	0.102 mm	PSTC 133
Adhesion to Steel (Initial)	46 oz/in	5.03 N/cm	PSTC 101 Mod - 1 mil PET
Adhesion to Steel (24 Hr Dwell)	70 oz/in	7.66 N/cm	PSTC 101 Mod - 1 mil PET
Adhesion to Steel (Initial)	80 oz/in	8.75 N/cm	PSTC 101 Mod - 4 mil Alu Foil
Adhesion to Steel (24 Hr Dwell)	96 oz/in	10.50 N/cm	PSTC 101 Mod - 4 mil Alu Foil
Shear Strength (at 72 °F)	>7 Days		PSTC 107 Mod
Laminating Temperature	68 to 100 °F	20 to 38 °C	
Service Temperature	-30 to 220 °F	-34 to 104 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.